


SGWMC / MU



TECHNICAL SPECIFICATIONS

| | | | |
|-----------------------|--|------------------------------|--|
| Operation | Motor wing operable in either direction | Operating Voltage | 220 VAC, 60 Hz |
| Chassis | 2 piece, 2 mm thick polished, shiny AISI 304 quality stainless steel pipe | Power Consumption | 20 W during passages, 15 W during stand-by |
| Wings | 10 mm thick Plexiglas/optional tempered glass | Operating Temperature | -20°C / +50°C |
| Functions | Automatic closing, service mode, soft stop capability at locking points, audio warning. | Opening-Closing Speed | 2 seconds |
| Emergency Mode | In cases of emergency, the unit switches in to "emergency mode" following the signal received from fire detection system, and the wing can be opened in either directions automatically. | Passage Width | 80 cm |
| | | Weight | 40 kg |
| | | Security Level | Deterrent |
| | | Areas of Use | Suitable for indoor use (can be used outdoors with the addition of SQWMU Model Cover) |

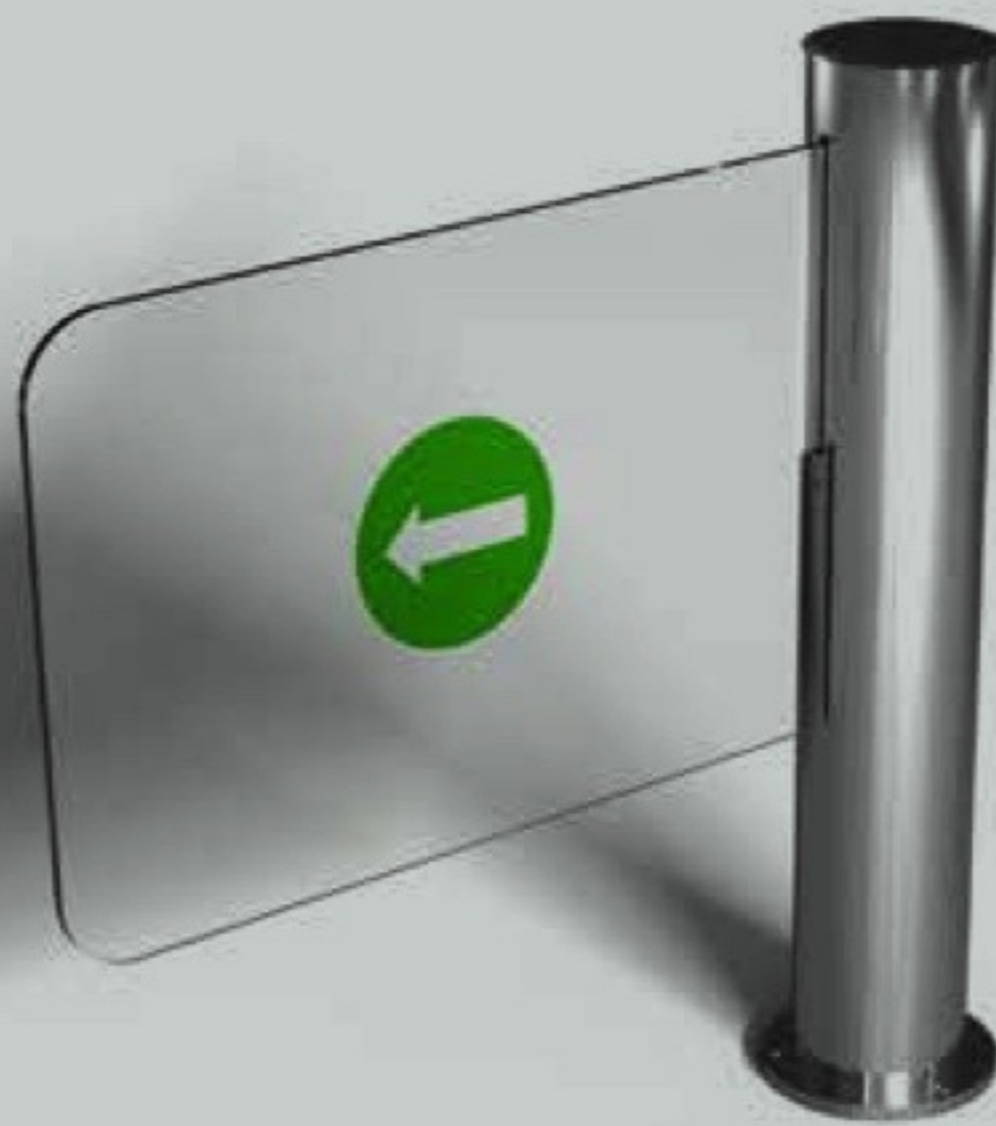