


TapMark™ Tags

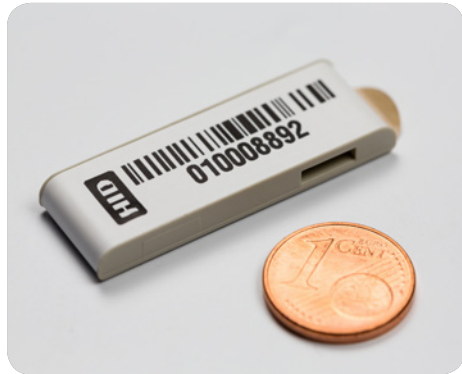

SLIM RAIN® UHF TRANSPONDERS MOUNT TO SURFACE OF ANY INDOOR ASSET

- **Small, thin-profile tags** for seamless identification of indoor assets
- **Broadband RAIN UHF tag** delivers read ranges up to 9.8 ft (3 m) whether mounted to metal, plastic or wood
- **A variety** of mounting options allow tag fixation to virtually any surface

HID Global TapMark™ UHF tags provide unique identities to each of the thousands of indoor assets like office furniture, technical equipment or IT assets within complex datacenters. The RAIN® UHF RFID technology of the TapMark™ tags helps to rapidly locate each component and uniquely identify it for inventory or maintenance purposes.

The Monza R6 chip provides 96 bit read/write EPC memory delivering read rates up to three times faster than previous generation tags. Further, the Monza R6 TagFocus™ feature improves read reliability, especially where large, dense populations of tags are present and its AutoTune™ functionality compensates for changing environmental conditions to retain optimal performance.

With TapMark tags in place; datacenter and facilities managers can perform faster, more accurate inventories, easily locate individual components, and implement automated security routines. Hardware can be optimized throughout its lifecycle, and easily identified when maintenance or replacement is required.

HID Global TapMark tags may be ordered personalized with custom encoding, printed logos, Bar-/QR-code or text and alternative colors.

Small, thin-profile TapMark transponders are available with a variety of mounting options - including zip-ties, industrial adhesives, magnets and screws - for affixing to any surface, including metal. Two types of high-bond stickers are available to affix the tag on even or uneven surfaces with excellent durability. A special antenna design allows the tag to be optionally affixed with a metallic screw right through the middle of the tag for optimal fit without affecting tag performance.

TECHNOLOGY HIGHLIGHTS:

- Multiple fixation options: zip-tie, stickers, screw, magnet
- Broadband 865 to 956 MHz, on or off metal
- Monza R6 IC, 96 bit read/write EPC memory
- Read range up to 9.8 ft (3 m)
- EPC Global Class 1 Gen 2, ISO 18000-6C
- Custom printing and encoding options

APPLICATION AREAS:

- **Asset tracking and logistics**
 - Information technology (IT) system components
 - Blades, routers, servers, etc.
 - PCs, Laptops, Monitors, Printers
 - Office furniture
 - Indoor equipment e.g. water cooler, fridges, projectors, etc.



SPECIFICATIONS

	TapMark™ UHF Tags				
	Standard	Sticker	Magnet	Screw	Foam Sticker
Base Model Number	6F1950	6F1950-001	6F1950-002	6F1950-003	6F1950-004
ELECTRONIC					
Operating Frequency	865-956 MHz (worldwide)				
Chip Type	Monza R6				
Memory	96 bit read/write				
Anti-Collision	Yes				
Reading Distance	9.8 ft (3 m)				
PHYSICAL					
Dimensions	1.5 × 0.5 × 0.2 in (38 × 13 × 4.3 mm)	1.5 × 0.5 × 0.2 in (38 × 13 × 4.5 mm)	1.5 × 0.5 × 0.25 in (38 × 13 × 6.0 mm)	1.5 × 0.5 × 0.2 in (38 × 13 × 4.3 mm)	1.5 × 0.5 × 0.2 in (38 × 13 × 5.4 mm)
Mounting Method	Zip-tie or apply Adhesive Glue	3M Acrylate Adhesive Sticker	3M Plastiform Flexible Magnet	Pre-drilled screw hole ø 2.7 mm	Lintec Acrylate Adhesive Sticker
Affixes to	Any material, including metal				
Target Surface	Even surface or supporting zip-tie	Even surface	Magnetic even surface	Supporting screws	Rough, uneven or curved surface
Housing Material	ABS holder, PET label				
Color	Grey holder, White label				
Weight	0.07 oz (2.0 g)		0.15 oz (4.3 g)	0.07 oz (2.0 g)	
CHEMICAL AND MECHANICAL RESISTANCE					
Water	IP67, 1 m × 1 h				
Withstands Exposure To	68° F (20° C), 100 h				
Axial / Radial Force	500 N, 10 sec, 5 times				
Vibration	IEC 68.2.6 [10 g, 10 to 2000 Hz, 3 axis, 2.5 h]				
Shock	IEC 68.2.29 [40 g, 18 ms, 6 axis, 2000 times]				
Electrostatic Discharge	± 2kV, 2 times				
THERMAL					
Storage	-40° to +158° F (-40° to +70° C), 1000 h				
Operating	-40° to +158° F (-40° to +70° C)				
Shock/Fatigue	-40° to +158° F (-40° to +70° C), 100 × 5 min with 30 sec transition				
Peak	482° F (250° C), 1 min				
OTHER					
Standards	EPC Global Class 1 Gen 2, ISO 18000-6C				
Options	Printed logo, laser imprint, encoding				
Quantity Per Box	280 pcs per box; 2800 pcs per carton				
Warranty	2 years				



hidglobal.com

North America: +1 512 776 9000
 Toll Free: 1 800 237 7769
 Europe, Middle East, Africa: +44 1440 714 850
 Asia Pacific: +852 3160 9800
 Latin America: +52 55 5081 1670

© 2016 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, and TapMark are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.
 2016-04-28-hid-rfid-il-tapmark-uhf-ds-en PLT-02848

An ASSA ABLOY Group brand

ASSA ABLOY